




HMC MODEL 4800 (HORIZONTAL) BANDMILL

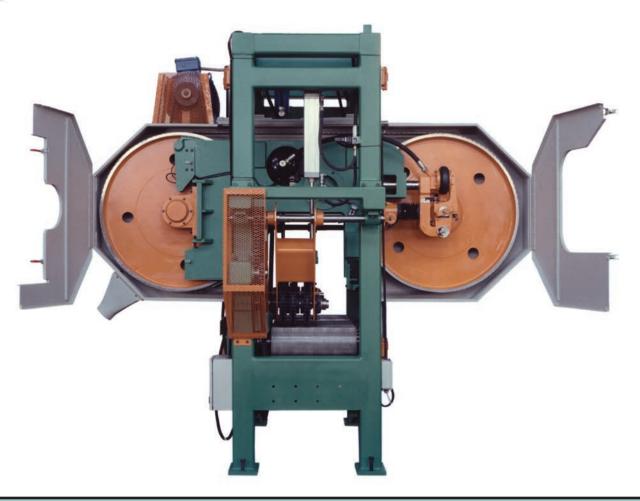

Specifications

Air strain

Welded steel construction (tubular) of the support frame

Front and rear lumber hold-downs

Roll bed drive, 5HP electric variable speed drive (VFD) synchronized with front and rear hold-downs

Cartridge style pressure guides with guide dressing machine

Cast iron wheels, support and bearing housings

49" diameter wheels to carry a 6" wide saw blade

Motorized wheel lift

Wheel tilt for blade tracking

Computer controlled proportional hydraulic setworks with infinite sets (includes hydraulic power unit)

Pneumatically operated blade braking system

Automatically centralized lubrication for wheels and blade surfaces

100HP TEFC motor, starter and V-belt drive



HMC Corporation

284 Maple Street

Contoocook, NH 03229 Phone 603-746-4691

Fax 603-746-4819

Email hmccorp@worldnet.att.net

Web www.hmccorp.com